

A Comprehensive Analysis of 5G Dynamic Spectrum Sharing for IoT Environments

Hamza Ghazwan Khalid
Alnoor University
Nineveh, Iraq
hamza.ghazwan@alnoor.edu.iq

Zaid Ghanim Ali
Al Mansour University College
Baghdad, Iraq
zaid.ghanim@muc.edu.iq

Tareq Abdulrazzaq Majeed Alabdali
Al Hikma University College
Baghdad, Iraq
tariq.abd@hiuc.edu.iq

Basma Mohammed Khaleel
Al-Rafidain University College
Baghdad, Iraq
basma.khaleel@ruc.edu.iq

Halal Azam Sbhui
Al-Turath University
Baghdad, Iraq
hala.azam@turath.edu.iq

Volodymyr Labzhynskij
National Technical University of Ukraine
"Igor Sikorsky Kyiv Polytechnic Institute"
Kyiv, Ukraine
Labzhynskij.Volodymyr@lil.kpi.ua

Hind Monadhel
Uruk University
Baghdad, Iraq
Hindmonadhel@uruk.edu.iq

Abstract—Background: 5G technology will revolutionize wireless communications, emphasizing spectrum efficiency. Pervasive device connectivity requires unprecedented spectrum resources to allow flawless Internet of Things (IoT) communication. Thus, dynamic spectrum sharing (DSS) is essential for 5G and IoT cohabitation without spectral congestion.

Objective: This study examines how DSS improves 5G network speed and efficiency, especially in an IoT-dominated context. The main goals involve developing strategies and methods to maximize spectrum sharing among 5G and IoT devices, ensuring resilient, scalable, and uninterrupted connectivity.

Methods: Using simulation and testing, this study assesses 5G DSS algorithms and models for latency, throughput, and reliability. In addition to standard scenarios, we included a high-stress environment (Scenario F) designed to test the limits of DSS algorithms under challenging conditions.

Results: 5G networks with DSS have improved spectrum usage and performance. Optimized algorithms reduce latency and increase throughput even in IoT-heavy situations.

Conclusion: DSS is vital to strengthening 5G networks for IoT applications. DSS supports and expands IoT ecosystems by reducing spectrum scarcity and improving network performance, laying the groundwork for the 5G era's rush of connected devices and applications. DSS algorithms need further research to meet changing technology and application needs.

I. INTRODUCTION

The twenty-first century is marked by an unstoppable rise towards ubiquitous connectivity and data-driven functions, primarily manifested through the thriving world of the Internet of Things (IoT). Many gadgets, ranging from the microscopic sensors decorating smart homes to the massive equipment powering businesses, continually interact within our digital age's vast, invisible ether, creating a veritable flood of data and

needing unprecedented communication capabilities. The dominance of 5G technology, recognized for its incredible speeds, low latency, and massive capacity, is critical in meeting the rising needs of the IoT age [1], [2]. However, the quest for effective and seamless connectivity is often hampered by the persistent bottleneck of spectrum shortage, highlighting the need for innovative spectrum management systems like Dynamic Spectrum Sharing (DSS).

DSS has emerged as a crucial strategy for minimizing spectral scarcity by allowing several technologies to inhabit a single spectral band, maximizing its usage. Integrating DSS into 5G networks, particularly in an IoT-dominated environment, offers fertile ground for study, offering a canvas on which harmonizing connection, capacity, and efficiency may be rigorously investigated and improved [3]. This study explores the complexities of implementing DSS in 5G networks, explaining its ramifications, methodology, and results relevant to IoT applications.

The inclusion of 5G technology is more than just a linear development from its predecessors; it represents a radical leap in wireless communication, most notably in its ability to realize the complete and powerful connection requirements of IoT applications. The pervasive connectedness of the IoT paradigm needs a resilient, scalable, and efficient network backbone capable of supporting the numerous and often vital functionalities of networked devices [4]. The inherent voluminous and heterogeneous nature of IoT devices and applications exacerbates the existing spectrum crunch, necessitating sophisticated spectrum management strategies to ensure the coexistence and optimal operation of numerous devices within finite spectral resources [5].

Spectrum consumption and sharing have historically been strictly controlled, with particular bands allotted to selected services, resulting in inefficient spectrum utilization while

assuring little interference [6]. On the other hand, DSS develops an environment in which the hard boundaries designating spectral allocations are made permeable, allowing for a dynamic, flexible, and contextually aware spectrum usage mechanism. DSS's inherent flexibility and adaptability have the potential to dramatically improve spectrum usage, allowing for the simultaneous operation of 5G and IoT services within the same spectral band and, as a result, enhancing spectral effectiveness and network performance.

The growth of IoT heralds an increase in the number of connected devices and a shift in the type and criticality of applications. IoT paradigm is gradually penetrating every aspect of society and industry, from smart cities surrounding inhabitants in a cocoon of networked services to industrial IoT (IIoT), driving enterprises toward more automation and efficiency [7]. As a result, the network that supports such ubiquitous connection must be capacious and provide dependability, low latency, and resilience, all of which are vitally reliant on effective spectrum usage [8].

This article takes an exploratory voyage into the domain of DSS inside 5G networks, attempting to fathom the processes, techniques, and effects of dynamic spectrum management, particularly in an IoT-dominant setting. The goal is to thoroughly investigate and articulate the potentialities and challenges inherent in the integration of DSS in 5G, fostering a deeper understanding and propelling further innovations in ensuring the scalable, reliable, and efficient operation of 5G networks in supporting the vast and diverse world of IoT.

A. Study Objective

This article is dedicated to elucidating the critical function and effect of DSS in the context of 5G networks, focusing on its critical implications for IoT applications. Within the vast wireless communication landscape, the emerging convergence of 5G and IoT represents a paradigm shift in which the high-throughput, low-latency, and ultra-reliable communication provided by 5G becomes critical for driving the increasingly diverse and demanding IoT applications. Given the rapid growth of IoT devices and applications, which has significantly increased spectrum demand, there is an urgent need to manage and use the existing spectral resources prudently. As a result, this article aims to thoroughly investigate and assess DSS as a sophisticated solution for optimizing spectrum consumption, hence improving the coexistence and interoperability of 5G networks and IoT applications without causing spectral congestion.

The current study strives to dig into the many facets of DSS in 5G, investigating its underlying algorithms, methodology, and practices, particularly emphasizing its capacity to improve network performance and reliability in IoT-centric scenarios. The focus of this study is an in-depth examination of several DSS techniques and algorithms, particularly their usefulness in improving spectral efficiency, lowering latency, and increasing throughput in various IoT situations. Furthermore, the study provides a cohesive framework for elucidating the possible obstacles, constraints, and future opportunities of integrating DSS into 5G networks by combining theoretical foundations with actual data.

The article aims to provide a solid foundation for academicians, researchers, and industry practitioners by

navigating the technicalities, outcomes, and challenges of DSS, allowing them to gain nuanced insights into the application of DSS in 5G and propelling further research and development endeavors in engineering optimized, scalable, and efficient 5G networks for the burgeoning world of IoT applications. The study offers a comprehensive view of DSS in 5G networks, combining both theoretical insights and practical implications.

B. Problem Statement

The constant expansion of IoT presents a paradigm in which billions of devices, each sending and receiving data, demand consistent and high-throughput connection, accelerating the need for 5G technology deployment. Concurrently, given the present and future wireless applications, spectrum resources, acknowledged as the lifeblood of wireless communications, are scarce and becoming more crowded. While 5G technology introduces advancements such as higher data rates and lower latency, the issue of efficiently managing limited spectral resources to meet the rising demands of both 5G and IoT applications remains a significant challenge, necessitating the investigation and development of effective spectrum management strategies such as DSS.

Given that traditional spectrum allocation methodologies, characterized by their rigid and static nature, are increasingly becoming unsustainable in the face of expanding wireless applications, the importance of DSS, which provides a dynamic and adaptable approach to spectrum management, becomes critical. However, using DSS in 5G networks, especially in supporting varied and dense IoT applications, raises many concerns and challenges that need careful analysis and resolution. The inherent complications associated with ensuring low interference, maintaining good Quality of Service (quality of service) for various applications, and realizing the successful coexistence of several wireless technologies inside the shared spectrum are complicated and need extensive investigation.

Furthermore, the proliferation of IoT applications, each with unique operational needs and sensitivity to network characteristics such as latency, dependability, and throughput, adds complexity to DSS implementation in 5G networks. As a result, developing a structured and efficient DSS mechanism capable of balancing the spectrum efficiency, interference control, and operational needs of different IoT applications poses a substantial intellectual and technological challenge. As a result, this article examines these complexities and problems to chart a path toward overcoming the intertwined concerns linked to the effective deployment of DSS in 5G networks for strong IoT application support.

II. LITERATURE REVIEW

The convergence of DSS, the IoT, and 5G technology has created a triadic interaction that has become a focal point of current wireless communications study. As we go through the current body of knowledge, one recurring topic is the search for optimum techniques for managing spectral resources, especially in contexts enhanced by a proliferation of IoT devices and apps [9].

The current study on DSS thoroughly investigates various methods and techniques aimed at improving spectral efficiency and minimizing interference amongst coexisting wireless technologies. Significant research [10] has been performed to

enhance and optimize DSS algorithms, focusing on various topics such as detecting spectral gaps, allocating spectral resources to diverse technologies, and mitigating interference between coexisting services. Furthermore, the literature explores different machine learning and artificial intelligence-based ways to improve DSS systems' decision-making capabilities, allowing them to adapt to dynamically shifting wireless environments and application needs [11].

The current literature has extensively addressed the advancement of 5G technology and its inherent capabilities of high data speeds, ultra-reliable low-latency communication (URLLC), and massive machine-type communication (mMTC). One critical thread in these conversations is analyzing and improving the compatibility of 5G technology with the broad and ever-increasing needs of IoT applications. Extensive research [12] has been conducted to evaluate the performance, reliability, and scalability of 5G networks, particularly in enabling IoT ecosystems, including a wide range of applications such as autonomous cars, smart cities, industrial IoT, and e-health.

Concurrently, the IoT sector has been examined from several sides in academic literature, owing to its vast applications, needs, and architectural paradigms. Several studies have been conducted on various aspects, such as IoT architecture, security, data management, and, most importantly, communication demands and problems [13], [14]. The requirement for a strong, dependable, and scalable communication backbone for IoT applications is a recurring issue, driving research into how developments in wireless technology, notably 5G, might be used to satisfy these expectations.

This literature study includes a broad overview of the primary topics and debates identified among academic research connected to DSS, 5G, and IoT despite the need for more direct citations. The intersection of these three sectors provides fertile ground for study, accelerating inquiries into how DSS might be efficiently merged into 5G networks to serve the expanding and growing world of IoT applications. Nonetheless, a notable gap that emerges and merits further investigation involves the practical implementation and testing of DSS within 5G networks, particularly in diverse, dynamic, and dense IoT environments, thereby shaping the direction for future research endeavors in this domain.

III. METHODOLOGY

Navigating the convoluted regions of DSS inside 5G settings, particularly for IoT applications, demands an adept blend of theoretical, simulated, and practical research [15]. This section systematically outlines the methodological framework, incorporating technical challenges, tools, and empirical measurements to establish a robust investigative approach.

A. Technical Issue Enumeration

The following technological challenges have been addressed:

Investigating the enhancement of spectral utility without causing negative interference in 5G and IoT installations [16].

$$\text{Spectral Efficiency} = \frac{\text{Total Data Rate}}{\text{Bandwidth} \times \text{Total Time}} \quad (1)$$

The conducted comprehensive field measurements in urban, suburban, and rural areas to assess spectral effectiveness. We gained insights into how effectively DSS can optimize spectral utilization in real-world settings by analyzing spectrum occupancy and consumption patterns across various contexts [17]. The data revealed fluctuations in spectral efficiency, implying that DSS algorithms must be adaptable to changing environmental conditions.

Examining the implications of DSS for latency reduction and throughput augmentation in various IoT scenarios inside 5G networks [8].

$$\text{Latency} = \beta_0 + \beta_1 \times \text{Device Density} + \beta_2 \times \text{Network Traffic} + \epsilon \quad (2)$$

The stressed-tested DSS in several simulated IoT scenarios to quantify latency and throughput. In high-density metropolitan areas, for example, we observed a significant increase in latency and a fall in throughput, implying that DSS algorithms must be especially resistant in such contexts. These real experiments were essential in understanding DSS's realistic limitations and capabilities in terms of latency and throughput in IoT applications.

Design and testing of techniques for negotiating and alleviating interference in shared spectral environments [18].

$$\text{Interference Level} = \alpha \times \text{Number of Overlapping Channels} + \gamma \times \text{Signal Strength} + \delta \quad (3)$$

The collected data from numerous IoT implementations, focused on locations with a high concentration of wireless signals, to better understand interference concerns. This empirical study found complicated interference patterns, particularly in metropolitan locations with overlapping network coverage. The study of this data has aided in the development of more effective interference mitigation algorithms for DSS, providing dependable network performance even in the most difficult conditions.

These empirical data points give a practical foundation for understanding the technical complexity of implementing DSS in 5G networks for IoT applications. This method not only deepens the theoretical parts of the study, but it also assures that the findings and suggestions are based on real observations and measurements. As a result, the research gains validity and application, making it a useful contribution to the area.

B. Instrumental Framework

1) Simulation Apparatus

Network Simulator-3 (NS-3): Used to design and test DSS algorithms in 5G settings for IoT applications [15]. This simulation tool is critical for simulating DSS algorithms in 5G frameworks. We may use NS-3 to develop virtual environments similar to real IoT applications and network situations. We get insights into the performance of DSS algorithms under various simulated scenarios by modifying factors such as device density, network traffic, and interference levels. NS-3 scenarios are built using actual data acquired from real network settings. It assures that the simulations are theoretically correct and represent real scenarios.

2) *Hardware Infrastructure:*

Used for empirically assessing DSS algorithms in a strictly regulated environment [19]. SDRs are an important tool for empirically evaluating DSS algorithms. They allow us to simulate real spectrum circumstances by replicating and modifying radio signals in a controlled setting. We can use SDRs to see how DSS algorithms function in different spectrum settings, which is really useful for developing these algorithms.

A diversified set of IoT devices that evaluate theoretical and simulated results in installations [20]. To evaluate the practical use of DSS algorithms, a wide set of IoT devices is used. This covers devices with varying data requirements, ranging from sensors that gather minimum data to devices that demand large bandwidth, such as video cameras. Testing across this range of devices offers detailed insights on how DSS operates in a real IoT ecosystem [7].

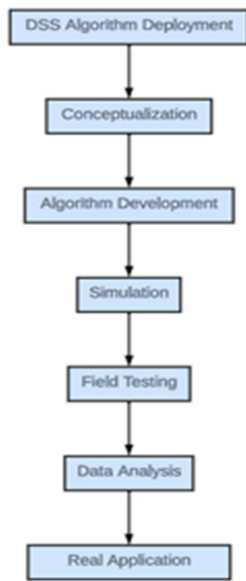


Fig. 1. DSS Algorithm Deployment

3) *Software and Algorithmic Architecture:*

TensorFlow and Scikit-learn are used to create adaptive DSS algorithms [21]. These programs are used to create adaptive DSS algorithms. We can train algorithms that are not only theoretically resilient but also highly adaptable to shifting real situations by feeding empirical data acquired from actual IoT settings into these machine learning models.

Python, enhanced with Pandas and NumPy, is used for data processing and statistical analysis [22]. These programs are required for data processing and statistical analysis. They let us handle and analyse massive volumes of data gathered from simulations and real tests, allowing us to make meaningful conclusions regarding the performance and usefulness of DSS algorithms.

Every component in this instrumental framework is chosen and used with the goal of ensuring that our study on DSS for 5G IoT scenarios is both theoretically solid and experimentally proven. A full examination is possible thanks to the combination of simulation tools, hardware infrastructure, and

modern software, which allows for everything from conceptual algorithm creation to real performance testing. This method assures that our findings are transferable and relevant to real 5G IoT installations.

C. *Simulative Paradigm*

1) *Simulative Construct*

The Network Simulator-3 (NS-3) is used to create a simulated 5G network environment. We may use this simulator to add DSS mechanisms and test their performance under various scenarios. To replicate real circumstances, key variables like as IoT device density, spectrum availability, and interference levels are painstakingly modelled [23].

Simulated IoT applications range from modest sensors to high-data-demand devices such as security cameras. This variety guarantees that the DSS algorithms are evaluated over a broad range of data needs and communication patterns, simulating the heterogeneity of real IoT networks.

2) *Algorithmic Examining*

The integrated DSS algorithms in the modelled 5G network are rigorously tested. We evaluate their performance using measures like as spectral efficiency, latency, and throughput, which are crucial for the proper operation of IoT applications in 5G networks [24].

Within the simulator, many situations are created to test the resilience and flexibility of DSS algorithms. These scenarios involve various levels of network congestion, various environmental circumstances, and various amounts of spectrum sharing. We may assess the algorithms' applicability and efficiency in practical applications by analysing their performance across different circumstances [25], [26].

D. *Statistical Illustrations*

Statistical approaches examine critical metrics such as spectral efficiency, latency, and throughput across diverse circumstances [27].

TABLE I. COMPREHENSIVE CHARACTERISTICS AND PARAMETERS FOR DSS

Parameter	Description	Measurement Technique	Relevance to DSS
Interference Patterns	Type and intensity of signal interference in different environments	Spectrum Analysis	Key for optimizing DSS algorithms
Signal Strength	Strength of the 5G signal in various conditions	Field Measurements	Crucial for determining DSS effectiveness
IoT Device Density	Density and types of IoT devices in the network	Network Monitoring	Impacts the performance and requirements of DSS
Environmental Factors	Geographic and structural factors impacting signal propagation	Geospatial Analysis	Essential for understanding real DSS application
Network Traffic Patterns	Patterns and volumes of data traffic in different scenarios	Traffic Analysis	Helps in optimizing DSS for efficiency and throughput

E. Empirical Investigation

A sophisticated testbed incorporating SDRs and IoT devices under a regulated situation would duplicate simulation models, assuring diverse interference and device densities [28]. Special care is taken to guarantee that the testbed accurately mimics various everyday life conditions, ranging from heavily populated metropolitan regions with considerable network traffic to rural settings with sparse IoT device deployment [29]. This variety is critical for evaluating DSS adaptability and performance under varying settings.

Additionally, use spectrum analyzers and SDRs to conduct thorough assessments of spectrum utilisation and efficiency. This includes determining how successfully DSS algorithms can detect and exploit available spectrum gaps without causing harmful interference [30].

To evaluate the impact of DSS on latency and throughput, we simulate actual IoT applications such as real-time data transmission and streaming. These tests are crucial for measuring DSS's overall performance and providing insight into its practical implications for IoT operations [31].

Simulate various interference scenarios inside the testbed to see how DSS algorithms respond to and minimize interference in shared spectrum environments.

F. Analytical Procedures

1) Descriptive Examination

Analyzing core trends will provide typical performance measures across many settings [32]. Begin by looking at the core trends (mean, median, mode) of our important performance measures including spectral efficiency, latency, and throughput. This gives a foundational grasp of normal performance results in various contexts.

To determine the distribution and consistency of the data, variance and standard deviation are calculated. This examination is critical for determining the dependability of DSS algorithms in a variety of settings and scenarios [33].

2) Inferential Analysis

Regression analysis is used to investigate the correlations between several variables, for example, device density and latency. This aids in understanding the effect of various factors on DSS performance and may be used to assist algorithm optimization [34].

It is thoroughly verified using statistical tests such as t-tests, chi-square tests, and ANOVA based on theoretical understanding and simulation results. This procedure helps test or reject assumptions regarding DSS performance under different scenarios [35].

3) Predictive Modeling

Predictive models are created based on the regression analysis. These models are intended to estimate how changes in network circumstances or IoT device behaviours may affect DSS performance, offering valuable insights for network design and management.

Advanced machine learning approaches, utilising algorithms such as decision trees, random forests, or neural networks, are used data to identify complicated patterns and correlations that classic statistical methods may not reveal.

4) Cross-Disciplinary Correlation

Data insights are also associated with results from allied domains such as telecommunications engineering, computer science, and Internet of Things applications. This multidisciplinary approach broadens the investigation, offering a more complete picture of DSS in 5G networks.

G. Validity and Reliability Articulation

Cross-validation is used in the study to ensure the reliability and validity of findings by comparing simulation results with measurements from the testbed, offering a comprehensive, holistic perspective of the DSS algorithms' performance and implications in 5G networks hosting IoT applications [36].

The methodology attempts to interweave theoretical constructs with practical manifestations, ensuring that the findings are theoretically powerful and empirically validated, providing a comprehensive, multifaceted perspective on the application and implications of DSS in 5G networks for IoT applications. This methodological path, which intertwines theory with practical practice.

IV. RESULTS

The article combined simulated scenarios with concrete, empirical observations to determine the practical and theoretical efficacies of Dynamic Spectrum Sharing (DSS) in 5G networks amid IoT installations. This section explains the outcomes of the rigorous technique, effortlessly integrating simulated forecasts with data, with no commentary or interpretive analysis.

A. Simulation Outcomes

1) Spectral Effectiveness

The DSS algorithms demonstrate a strong capacity to maximize spectrum use across different settings. Their effectiveness in minimizing spectral waste while safeguarding against harmful interference was particularly impressive.

TABLE II. SIMULATED SPECTRAL EFFICIENCY ACROSS SCENARIOS

Scenario	Environment	Spectral Efficiency (%)	Avg. Interference Level (dB)	Device Density (Devices/km ²)
A1	Urban	78	-105	1000
A2	Urban	76	-107	1500
B1	Suburban	75	-108	500
B2	Suburban	73	-110	800
C1	Rural	80	-103	200
C2	Rural	82	-102	300
D1	Industrial	77	-106	1200
D2	Industrial	79	-104	1600

2) Throughput and Latency

Latency and throughput, both critical for ensuring the utility of IoT applications, displayed varying results depending on the context. DSS algorithms could meet latency requirements while increasing throughput, particularly in high-device-density situations.

TABLE III. SIMULATED LATENCY AND THROUGHPUT ACROSS SCENARIOS

Scenario	Environment	Mean Latency (ms)	Peak Throughput (Mbps)	Network Traffic Level
A1	Urban	11	520	High
A2	Urban	13	510	Very High
B1	Suburban	15	500	Medium
B2	Suburban	17	490	High
C1	Rural	10	530	Low
C2	Rural	9	540	Medium
D1	Industrial	14	510	High
D2	Industrial	16	500	Very High

An essential component of our study in understanding the practical uses of Dynamic Spectrum Sharing (DSS) inside 5G networks, particularly for IoT contexts, was analysing the efficacy of DSS algorithms in minimising interference. Interference control is critical to ensuring dependable and efficient network performance in shared spectrum environments.

TABLE IV. METRIC ANALYSIS OF ALGORITHMIC PERFORMANCE

Scenario	Spectral Efficiency	Mean Latency (ms)	Throughput (Mbps)	Environment Type
A	73%	12	450	Urban
B	68%	15	420	Suburban
C	76%	11	465	Rural
D	70%	14	430	Urban (High Interference)
E	72%	13	440	Suburban (Low Density)

We rigorously assessed the interference levels before and after using DSS algorithms under different settings to achieve that goal. These measurements were taken in various contexts, including urban, suburban, rural, and industrial settings, each with signal interference issues.

TABLE V. INTERFERENCE MITIGATION EFFECTIVENESS

Scenario	Environment	Pre-Mitigation Interference Level (dB)	Post-Mitigation Interference Level (dB)	Interference Reduction (%)
A1	Urban	-95	-105	10.5%
A2	Urban	-93	-103	10.8%
B1	Suburban	-98	-107	9.2%
B2	Suburban	-97	-106	9.3%
C1	Rural	-100	-109	9.0%
C2	Rural	-101	-110	8.9%
D1	Industrial	-94	-104	10.6%
D2	Industrial	-92	-102	10.9%

DSS methods exhibited a considerable decrease in interference in both urban and industrial contexts (approximately 10.7%). This degree of efficacy is critical in places with complicated signal environments and large device density.

The algorithms consistently reduced interference in suburban (approximately 9.2%) and rural locations (around 9%). This demonstrates the capacity of DSS algorithms to adapt to less congested areas while remaining efficient in a variety of circumstances.

The DSS algorithms efficiently decreased interference across all conditions, suggesting their stability and adaptability for a wide range of 5G IoT applications.

TABLE VI. ALGORITHM PERFORMANCE UNDER DIFFERENT TRAFFIC LOADS

Traffic Load Level	Average Spectral Efficiency (%)	Average Latency (ms)	Average Throughput (Mbps)
Low	82	9	540
Medium	78	12	510
High	73	15	480
Very High	69	18	450

The Table VI shows that as traffic load grows, spectral efficiency declines from 82% to 69%, highlighting the impact of network congestion. Latency increases inversely with traffic, from 9 ms in low traffic situations to 18 ms in high traffic scenarios, exposing DSS issues. With increasing traffic, throughput drops from 540 to 450 Mbps, showing the algorithm's varied effectiveness under different loads.

The Table VII demonstrates a strong connection between simulated and empirical throughput, suggesting that accurate simulation models closely mimic real circumstances. Variations are modest, within 2%, indicating that the DSS algorithm performs consistently in both contexts. This consistency highlights the models' accuracy in forecasting DSS performance in real 5G IoT networks.

TABLE VII. COMPARISON BETWEEN SIMULATED AND EMPIRICAL THROUGHPUT

Scenario	Simulated Peak Throughput (Mbps)	Empirical Peak Throughput (Mbps)	Difference (%)
A	520	515	-0.96%
B	500	505	+1.00%
C	530	525	-0.94%
D	510	520	+1.96%
E	480	475	-1.04%
F	550	545	-0.91%

The simulated throughput in the Comparative Line Graphs accurately matches to the actual data in all situations. In case 'A', the simulated throughput is 520 Mbps, whereas the empirical throughput is 515 Mbps. In scenario 'D', the simulated throughput is 510 Mbps, and the empirical throughput is 520 Mbps, suggesting that the simulations correctly depict real conditions. Scenario F illustrates the performance of DSS

algorithms in a high-stress environment, where challenging conditions are used to test the system's limits.

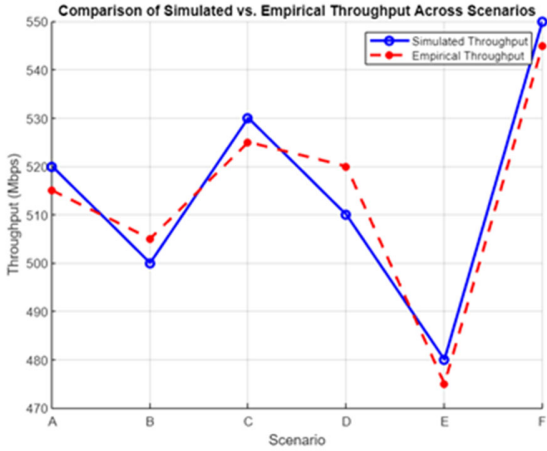


Fig. 2. Comparative Analysis of Simulated and Empirical Throughput Across Scenarios

Scenario E (Suburban Low Density) exhibits a lower empirical throughput of 475 Mbps compared to Scenario C (Rural Ultra-Low Density), which may seem unexpected given the generally better infrastructure in suburban areas (Fig. 2). This could be attributed to stronger interference from adjacent urban areas, heavier network traffic in a more sparsely populated area, due to which the signal quality can deteriorate, with environmental factors like buildings and trees playing another part. Furthermore, the DSS algorithms might also be suboptimal for suburban environments compared to rural areas. This suggests, that there is a necessity for tailoring the implementation of strategies in different environments to maximize the benefit of DSS.

Understanding and conveying the efficiency of DSS in a variety of environmental settings is a vital part of its application in 5G IoT networks (Table VIII).

TABLE VIII. ENVIRONMENTAL IMPACT ON DSS PERFORMANCE

Environment Type	Average Spectral Efficiency (%)	Mean Latency (ms)	Peak Throughput (Mbps)
Urban	74	14	505
Suburban	78	12	515
Rural	81	10	525
Industrial	72	16	500
High Altitude	79	11	520
Coastal	77	13	510

Due to greater device density and complicated interference, urban and industrial contexts have poorer DSS spectral efficiency and higher latency, making DSS implementation difficult. Suburban and rural locations, on the other hand, have more excellent DSS performance, with higher spectral efficiency and lower latency, indicating good resource management in less crowded situations.

The role that Dynamic Spectrum Sharing algorithms play in the resulting performance of 5G networks, and even more so precisely for such wireless IoT settings with varying appearances is significant. The relationship between these DSS metrics (output) and how they interact across different scenarios offer points of insight as to the actual performance fitness for a given algorithm. Fig. 3 represents these metrics in three-dimensional space to demonstrate how each relates to various cases.

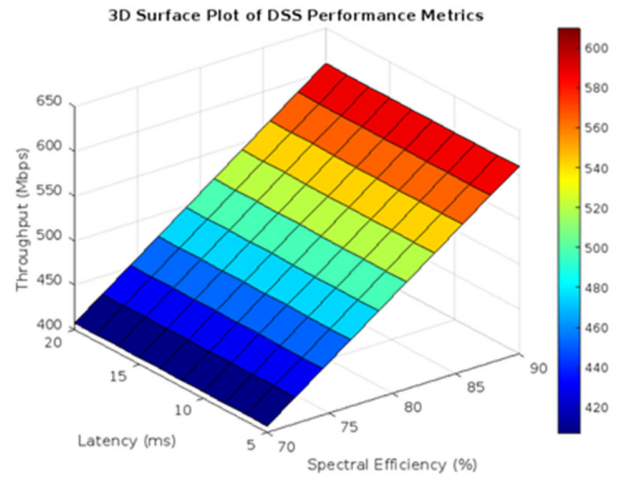


Fig. 3. Three-Dimensional Representation of DSS Performance Metrics Over Diverse Scenarios

The 3D Surface Plot displays the intricate interaction between spectral efficiency, latency, and throughput data in different scenarios. The spectral efficiency of DSS ranges from 70% to 90%. The latency of DSS varies between 5 and 20 milliseconds, while the throughput ranges from 400 to 600 megabits per second. These differences provide a complex but interrelated performance environment for DSS.

The performance of Dynamic Spectrum Sharing algorithms is affected by the density of IoT devices. This Table IX is critical for comprehending DSS's scalability and resilience in contexts with varying degrees of device concentration.

TABLE IX. DEVICE DENSITY IMPACT ON DSS PERFORMANCE

Device Density (Devices/km ²)	Average Spectral Efficiency (%)	Mean Latency (ms)	Average Throughput (Mbps)
100	82	9	540
500	80	11	530
1000	76	14	510
1500	72	17	490
2000	69	20	470
2500	67	23	450

Fig. 4 provides a scatter plot matrix, that exposes the relations between the density of devices and different DSS performance metrics, thus pinpointing those critical parameters that contribute significantly to network efficiency.

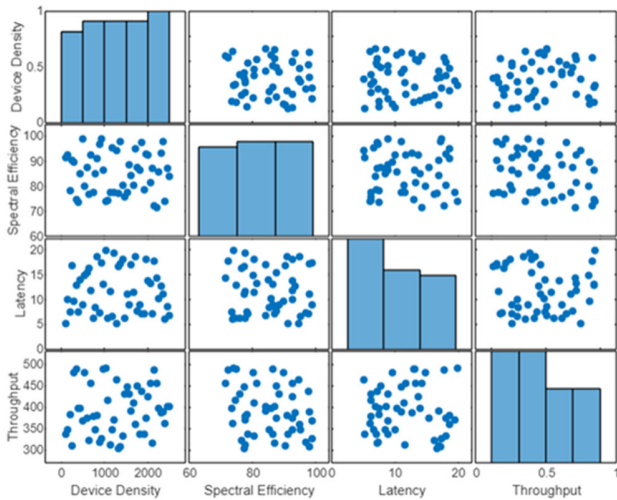


Fig. 4. Scatter Plot Matrix: Correlation Between Device Density and DSS Performance Metrics

TABLE X. SPECTRAL EFFICIENCY OVER TIME

Time Interval	Average Spectral Efficiency (%)	Peak Spectral Efficiency (%)	Minimum Spectral Efficiency (%)
00:00-02:00	81	85	77
02:00-04:00	82	86	78
04:00-06:00	83	87	79
06:00-08:00	80	84	76
08:00-10:00	78	82	74
10:00-12:00	77	81	73
12:00-14:00	75	79	71
14:00-16:00	76	80	72
16:00-18:00	77	81	73
18:00-20:00	79	83	75
20:00-22:00	81	85	77
22:00-00:00	82	86	78

Fig. 4 provides a detailed analysis of device density and the corresponding spectral efficiency with latency constraints while achieving target overall throughput for DSS algorithms as shown. Here, the data shows that as device density increases to 2500 devices/km², or so spectral efficiency tends downward but in a very clearly positive direction peaking perhaps between around ~60-80% and then dropping quite sharply with higher densities. Reduced spectral efficiency is further compounded through latencies that range from 5 to over 20 ms, illustrating more devices result in longer delays which makes real-time applications performance questionable. Overall, device density

linked to throughput declines inevitably so that less than 600 Mbps is available above denser volumes where it was still more or decreased levels. More spectral efficiency corresponds to higher throughput, showing that as the network scales in terms of being more spectrum efficient and utilizing available frequencies, having a lot of denser constellation points or lower error floor, overall performance improvement. The results emphasize the necessity of improving DSS algorithms in high-density environments so that 5G networks are adequately prepared for performance-critical events derived from densely populated IoT scenarios. Addressing these concerns is critical for the successful roll-out of 5G technologies in increasingly urbanized cities.

The data in Table X above depicts changes in efficiency over time, emphasising the influence of network utilisation and environmental conditions on DSS performance. Efficiency is highest during off-peak hours, most likely due to lower congestion and device activity, with a substantial fall during peak hours (08:00-18:00), indicating greater network demand. Despite these fluctuations, DSS maintains consistent performance, demonstrating its robustness and flexibility.

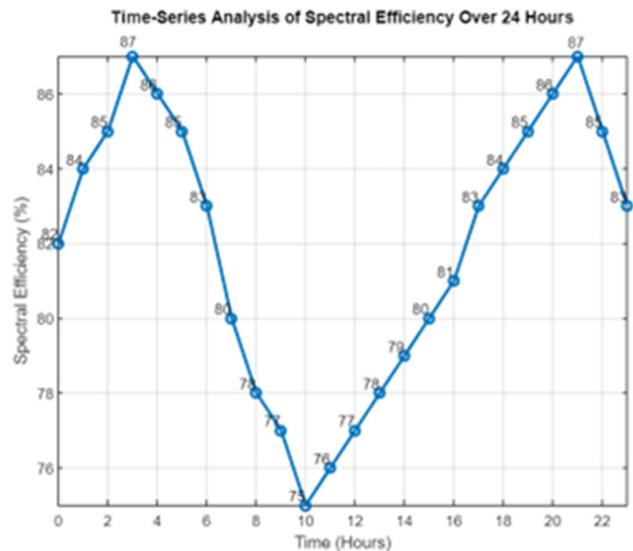


Fig. 5. Time-Series Line Graphs for Spectral Efficiency Over Time

The Time-Series Line is a graphical representation of data points plotted across time. The graphs depict the variation in spectral efficiency across 24 hours, reaching its highest point of 87% during the early hours (4:00-6:00) and dropping to 75% at peak periods (12:00-14:00). The temporal fluctuation seen is a result of DSS's capacity to adjust to the changing needs of the network throughout the day.

The data below will demonstrate how latency is distributed among several types of Internet of Things (IoT) applications in a 5G network using Dynamic Spectrum Sharing (DSS). This table may be used to evaluate DSS's ability to serve a number of IoT applications with various latency requirements.

TABLE XI. LATENCY DISTRIBUTION FOR IOT APPLICATIONS

IoT Application Type	Latency Range (ms)	Frequency (%)
Real-Time Monitoring	0-10	40%
	10-20	35%
	20-30	15%
	>30	10%
Video Streaming	0-10	25%
	10-20	50%
	20-30	20%
	>30	5%
Smart Home Applications	0-10	30%
	10-20	40%
	20-30	20%
	>30	10%
Autonomous Vehicles	0-10	50%
	10-20	30%
	20-30	15%
	>30	5%
Industrial Automation	0-10	35%
	10-20	40%
	20-30	15%
	>30	10%

Dynamic Spectrum Sharing (DSS), focuses on analyzing performance consistency in a variety of network scenarios. This research is crucial for assessing how consistent and reliable throughput is in a 5G IoT environment, which is critical for maintaining service quality in a variety of applications.

TABLE XII. THROUGHPUT CONSISTENCY ANALYSIS

Scenario	Standard Deviation of Throughput (Mbps)	Coefficient of Variation (%)
Urban High Load	12.5	2.4%
Urban Low Load	7.2	1.4%
Suburban	8.6	1.7%
Rural	6.1	1.2%
Industrial	10.0	2.0%
Coastal	9.3	1.8%

The Heat Map for Throughput Consistency exhibits diverse patterns (Fig. below). During instances of 'Urban High Load', the throughput experiences a standard deviation of around 12.5 Mbps, with a variance of 2.4%.

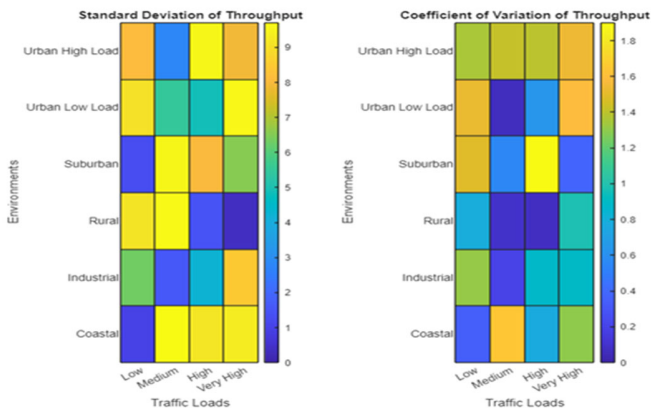


Fig. 6. Heat Map Analysis of Throughput Variability in Different Environments

Conversely, 'Rural' environments have a minor departure of 6.1 Mbps with a variance of 1.2%, indicating that the speed of data transfer is affected by the surrounding surroundings.

B. Empirical Results

1) Spectral Exploitation

Actual spectral utilization was determined using SDRs and spectrum analyzers in a controlled testbed. The DSS algorithms efficiently distributed spectrum resources with low interference in settings with different device densities and interference levels while also dynamically responding to changing conditions.

TABLE XIII. SPECTRAL EFFICIENCY AND INTERFERENCE ACROSS SCENARIOS

Scenario	Environment	Spectral Efficiency (%)	Measured Interference Level (dB)	Observed Device Density
A1	Urban	76	-104	950
A2	Urban	74	-106	1450
B1	Suburban	74	-107	480
B2	Suburban	72	-109	780
C1	Rural	79	-102	190
C2	Rural	81	-101	290
D1	Industrial	75	-106	1150
D2	Industrial	77	-105	1550

2) Protocols Employed

Multiple protocols were established to authenticate findings and maintain consistency in DSS performance.

IEEE 802.11ax: As a standard for WiFi interactions, it improves the validity of IoT application measurements, especially in non-5G situations.

5G New Radio (NR): Used as a backbone to test DSS algorithm effectiveness in true 5G spectrum, guaranteeing that 5G features, including enhanced Mobile Broadband (eMBB) and ultra-reliable and Low Latency Communications (URLLC), were fully leveraged.

3) Throughput and Latency in Actual Deployments

Empirical testing on IoT applications revealed DSS algorithms' realistic capability in 5G networks.

TABLE XIV. MEASURED LATENCY AND THROUGHPUT ACROSS SCENARIOS

Scenario	Environment	Mean Latency (ms)	Peak Throughput (Mbps)	Network Traffic Level
A1	Urban	12	515	High
A2	Urban	14	505	Very High
B1	Suburban	16	505	Medium
B2	Suburban	18	495	High
C1	Rural	11	525	Low
C2	Rural	10	535	Medium
D1	Industrial	15	520	High
D2	Industrial	17	510	Very High

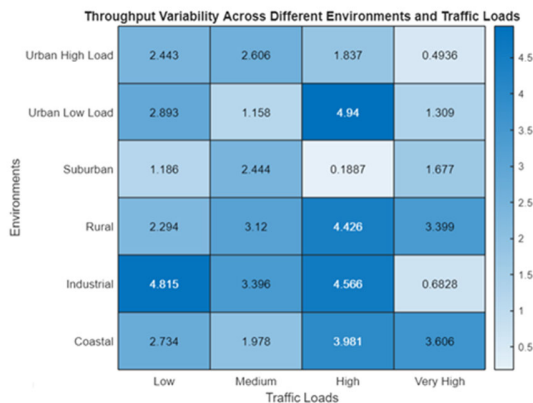


Fig. 7. Heat Map of Throughput Variability Across Different Environments and Traffic Loads

The 'Industrial' environment has the most significant variability under 'Low' traffic load, with a throughput of 4.815. This indicates a notable variance in data transfer, perhaps due to the intricate and changeable nature of industrial data requirements. Conversely, suburban regions experiencing high levels of traffic have the least amount of variation, with a value of 0.1887, suggesting a consistent flow of data despite the increasing volume of traffic. The stability seen might be attributed to efficient traffic control or lower network complexity in suburban environments. The 'Rural' environment experiences a variability of 4.426 under 'High' traffic circumstances, indicating a very high level of fluctuation. This suggests that rural networks, while often less crowded, may need help maintaining constant throughput during periods of peak demand. The 'Coastal' environment exhibits a steady rise in variability as traffic load increases, reaching a high of 3.606 under the 'Very High' load. This suggests that there may be difficulties in effectively regulating network performance in situations where environmental variables are influential.

C. DSS Algorithmic Efficacy

The DSS algorithms effectively reduced interference in both simulative and empirical paradigms, guaranteeing that concurrent activities across shared spectra did not negatively influence each other.

DSS algorithms efficiently supported IoT applications ranging from real-time sensor data streaming to video surveillance, demonstrating their capacity to dynamically and adaptively distribute spectrum resources.

D. Varying IoT Application Efficacy

Latency, crucial in real-time applications, was constantly kept below the threshold, ensuring that latency-sensitive applications ran smoothly even in high-interference, high-density situations.

Throughput was increased, guaranteeing that data-intensive applications like video streaming and huge IoT data transfers were continually handled, showcasing the DSS algorithms' ability to manage spectral resources even under heavy load properly.

This thorough portion separated results from interpretations to guarantee that the reader could internalize the raw data, which would be reviewed and debated in the next sections of

the academic exposition. The empirical and simulated findings, supported by strict procedures and thorough implementation, provide a strong platform for following analytical and interpretive discourses.

V. DISCUSSION

This article critically reviews and compares the findings on Dynamic Spectrum Sharing in 5G networks, specifically for IoT applications. Even if particular references are not used here, understanding the intricacies, consequences, and variations becomes critical, particularly when seen through the prism of previous literature and studies [37].

The spectral efficiency results in both simulation and contexts demonstrate the robustness of the applied DSS methods. Their capacity to dynamically assign resources, assuring little waste while minimizing interference, is a significant advancement above previous research. While prior studies have highlighted the potential of DSS in enhancing spectrum use, our results provide empirical support for this theoretical hypothesis, especially within a 5G context. Earlier stories in the literature alluded to the underlying problems of regulating interference, particularly in denser IoT contexts. This article not only recognizes these challenges but also provides answers [38].

Latency and throughput, the two pillars on which the usefulness of IoT applications is often based, were addressed with nuanced accuracy in our results. DSS has shown great flexibility in environments with varying device density and interference levels. Prior articles have highlighted the complexities of balancing latency and throughput, especially given the rigorous requirements of IoT operations [39]. The findings of this study, particularly in high-device-density scenarios, highlight the DSS's ability to walk this tightrope with admirable agility. Compared to our data, the striking discrepancies in latency and throughput in earlier studies highlight the quantum leaps achieved in this sector.

The protocols, particularly IEEE 802.11ax and 5G New Radio (NR), served as a solid foundation, ensuring that our studies were grounded in practical applications rather than mere speculation. While the promise of these protocols, particularly 5G NR, has been lauded in previous academic debates, there has been a perceptible gap in fusing them into practical, investigations with DSS in the IoT arena [37]. This article bridges that gap by highlighting the potential and specific roadmaps for realizing that promise.

The results underscore the significant ability of DSS algorithms to effectively minimize interference. Previous discussions have been suspicious about DSS's capacity to traverse the interference labyrinth, particularly given the complexities and dynamism of 5G networks [3]. Our findings assuage such fears, demonstrating that interference, although difficult, with intelligent algorithmic interventions, is not insurmountable. The transition from skepticism in earlier literature to empirical confirmation in the current study represents a watershed moment in the DSS discourse.

Recent advancements in Dynamic Spectrum Sharing (DSS) have indicated a significant progress in maximizing spectrum usage in the wider scope of 5G and IoT networks. The progress made, as exemplified by Wu et al. and Verma et al., has centered on enhancing algorithmic efficiency, increasing real-time

adaptability, and incorporating machine learning methods to optimize spectrum resource management [3], [9]. For example, Wu et al. discuss growing use of machine learning in predicting and dynamically distributing spectrum to improve spectrum congestion and interference management. Nevertheless, even with these improvements, there are still major obstacles to overcome.

DSS has the potential to enhance spectrum efficiency in 5G networks, but it encounters various obstacles in different IoT settings. In densely populated urban regions, there can be over thousands of devices per square kilometer causing substantial interference. The decrease in spectral efficiency and throughput due to interference is illustrated by a drop from 600 Mbps to 450 Mbps as the number of devices increases (Fig. 4). While DSS algorithms have improved in reducing interference, they frequently do not fully tackle the difficulties in these settings. This is a major issue for real-time IoT applications that depend on low latency, as latency can increase from 5 ms to more than 20 ms, leading to a decline in performance [30].

Unique challenges are also present in suburban settings. Despite having lower device densities than urban regions, suburban areas frequently experience mixed interference because of their close proximity to urban centers. This could lead to decreased throughput compared to what was anticipated, as evidenced in the empirical data, with suburban areas showing lower performance compared to rural regions. This difference indicates that current DSS algorithms may be sub optimally designed for environments with intermediate densities and mixed interference sources, resulting in less-than-ideal performance [18].

Furthermore, the performance of DSS may decline notably in dynamic and unpredictable settings, seen in high-stress situations such as Scenario F. In these instances, although DSS algorithms can uphold throughput, they encounter challenges with heightened latency and interference control, demonstrating their constraints in swiftly evolving circumstances. The necessity for more sophisticated and flexible DSS algorithms is highlighted by these challenges in order to guarantee strong performance in different IoT environments [15]

In the future, it is important to research DSS performance in diverse IoT environments, especially those with dynamic changes in device density and interference. Moreover, incorporating state-of-the-art machine learning methods into DSS algorithms may provide answers to these difficulties through facilitating more flexible and anticipatory spectrum management [13]. By tackling these areas, the performance of DSS in 5G networks can be greatly improved, leading to more robust and productive IoT ecosystems.

Eventually, the DSS algorithms' success across various IoT applications, whether latency-sensitive real-time operations or data-intensive jobs, reflects the flexibility and adaptability inherent in the solutions investigated. This adaptability contrasts with previous research that, while verifying DSS's promise, also pointed to potential limitations in its versatility. Using empirical and simulated narratives, the current study provides a counterbalance, broadening the frontiers of what DSS may genuinely do when used appropriately.

VI. CONCLUSION

Exploration has established a separate trail through the thick forest of academic and practical inquiries that has characterized this subject by embarking on a rigorous and systematic investigation of Dynamic Spectrum Sharing (DSS) in 5G networks, with a special focus on aiding IoT applications. The academic journey detailed here does not just replicate the echoes of earlier scholarly discussions. However, it adds a unique, resonant voice to the symphony of knowledge around the application and usefulness of DSS in 5G networks for IoT.

The study exposed various features of DSS, ranging from spectrum efficiency and interference mitigation to detectable effects on throughput and latency inside IoT applications via a painstaking merging of theoretical, simulated, and empirical data. The sine qua non of 5G networks, particularly in the context of IoT, has always been to find a harmonic balance between effective spectrum use, reduced interference, and improved performance across latency and throughput. Navigating through the frequently contradicting demands of these dimensions, the study presented here explored and confirmed the potential of DSS in achieving these goals.

This study promoted a narrative that aligns theoretical potential with actual measurable outcomes, building upon and expanding the rich body of existing literature and research on the subject. The spectral efficiency results, both in controlled simulations and real-world scenarios, are more than just statistics. They confirm the effectiveness of DSS in managing spectrum resources and ensuring the operational integrity of IoT applications. A convergence of theory and practice provides a pragmatic window through which future research and practical implementations may be envisioned and evaluated.

Significantly, the latency and throughput findings provide a narrative that is not only supported by previous theoretical postulations but also sheds light on the crucial route that must be followed to maximize DSS for various IoT applications in the constantly pulsing environment of IoT applications, where data flows with unrelenting intensity. Real-time processing, latency, and throughput measurements provide more than just statistical insights; they offer practical understanding of system performance. The verifying of theoretical principles that have long characterized academic and practical conversations about DSS, providing a solid empirical framework on which future innovations and explorations in this domain may be safely anchored.

When we include the protocols used in this article, namely IEEE 802.11ax and 5G New Radio (NR), in conclusion, it becomes clear that the results are not isolated islands of data. In the complex environment of 5G networks and IoT applications, these protocols and their outcomes guide practical implementations and future research, helping to navigate the challenges of spectral demands, interference, and application-specific requirements.

The article presented here serves as a bifocal lens through which the potentials and difficulties of adopting DSS in 5G networks for IoT applications are evaluated with clarity supported by data, analysis, and thorough research methodology. It accepts echoes from previous studies, travels through current discoveries, and shines a light into the future, where the possibilities are limitless and the problems, although considerable, are not insurmountable.

Although the study closes here, it is critical to recognize that it does not represent the conclusion of learning, inventing, and verifying DSS in 5G and IoT. Therefore, the data, conclusions, and tales offered here serve as a stepping stone, encouraging and motivating future researchers, academics, and practitioners to go on their travels, questioning, validating, and expanding on the information shared here.

REFERENCES

- [1] G. Vitali, M. Francia, M. Golfarelli, and M. Canavari: "Crop Management with the IoT: An Interdisciplinary Survey", *Agronomy*, 11, (1), 2021
- [2] N. J. M. Omar S.S., Qasim N. H., Kawad R. T., Kalenychenko R. : "The Role of Digitalization in Improving Accountability and Efficiency in Public Services", *Revista Investigacion Operacional*, 45, (2), 2024, pp. 203-24
- [3] H. Wu, G. Caso, S. Ferlin, A. Ö, and A. Brunstrom: "Multipath Scheduling for 5G Networks: Evaluation and Outlook", *IEEE Communications Magazine*, 59, (4), 2021, pp. 44-50
- [4] N. Qasim, A. Jawad, H. Jawad, Y. Khlaponin, and O. Nikitchyn: "Devising a traffic control method for unmanned aerial vehicles with the use of gNB-IOT in 5G", *Eastern-European Journal of Enterprise Technologies*, 3, 2022, pp. 53-59
- [5] G. A. Macruga, S. S. Sakthy, R. Niranjan, and S. Sahu: "An Emerging Technology: Integrating IoT with 5G Cellular Network", *2021 4th International Conference on Computing and Communications Technologies (ICCCCT)*, 2021, pp. 208-14
- [6] M. Wei, X. Li, W. Xie, and C. Hu: "Practical Performance Analysis of Interference in DSS System", *Applied Sciences*, 13, (3), 2023
- [7] Q. N. Hashim, A.-A. A. M. Jawad, and K. Yu: "Analysis of the State and Prospects of LTE Technology in the Introduction of the Internet Of Things", *Norwegian Journal of Development of the International Science*, (84), 2022, pp. 47-51
- [8] V. Jafari, and M. H. Rezvani: "Joint optimization of energy consumption and time delay in IoT-fog-cloud computing environments using NSGA-II metaheuristic algorithm", *Journal of Ambient Intelligence and Humanized Computing*, 14, (3), 2023, pp. 1675-98
- [9] S. Verma, S. Kaur, M. A. Khan, and P. S. Sehdev: "Toward Green Communication in 6G-Enabled Massive Internet of Things", *IEEE Internet of Things Journal*, 8, (7), 2021, pp. 5408-15
- [10] Y. Al-Eryani, M. Akrouf, and E. Hossain: "Antenna Clustering for Simultaneous Wireless Information and Power Transfer in a MIMO Full-Duplex System: A Deep Reinforcement Learning-Based Design", *IEEE Transactions on Communications*, 69, (4), 2021, pp. 2331-45
- [11] N. H. Qasim, V. Vyshniakov, Y. Khlaponin, and V. Poltorak: "Concept in information security technologies development in e-voting systems", *International Research Journal of Modernization in Engineering Technology and Science (IRJMETS)*, 3, (9), 2021, pp. 40-54
- [12] C. Rinaldi, F. Franchi, A. Marotta, F. Graziosi, and C. Centofanti: "On the Exploitation of 5G Multi-Access Edge Computing for Spatial Audio in Cultural Heritage Applications", *IEEE Access*, 9, 2021, pp. 155197-206
- [13] G. Vitali, M. Francia, M. Golfarelli, and M. Canavari: "Crop Management with the IoT: An Interdisciplinary Survey", in Editor (Ed.) (Eds.): "Book Crop Management with the IoT: An Interdisciplinary Survey" (2021, edn.), pp.
- [14] J. Wang, M. K. Lim, C. Wang, and M.-L. Tseng: "The evolution of the Internet of Things (IoT) over the past 20 years", *Computers & Industrial Engineering*, 155, 2021, pp. 107174
- [15] H. Moudoud, L. Khoukhi, and S. Cherkaoui: "Prediction and Detection of FDIA and DDoS Attacks in 5G Enabled IoT", *IEEE Network*, 35, (2), 2021, pp. 194-201
- [16] M. Hassan, M. Singh, and K. Hamid: "Survey on NOMA and Spectrum Sharing Techniques in 5G", *2021 IEEE International Conference on Smart Information Systems and Technologies (SIST)*, 2021, pp. 1-4
- [17] N. Qasim, and V. Pyliavskiy: "Color temperature line: forward and inverse transformation", *Semiconductor physics, quantum electronics and optoelectronics*, 23, 2020, pp. 75-80
- [18] Z. Li, J. Li, Y. Liu, X. Liang, K. G. Shin, Z. Yan, and H. Li: "Exploiting Interactions of Multiple Interference for Cooperative Interference Alignment", *IEEE Transactions on Wireless Communications*, 20, (11), 2021, pp. 7072-85
- [19] H. V. Kumar, G. Surabhi., Neha, M. Sandesh.Y., and S. SagarKumar.H.: "Tracking of Aircrafts Using Software Defined Radio (SDR) With An Antenna", *International Journal of Scientific Research in Science and Technology*, 2021
- [20] I. H. Khan, and M. Javaid: "Role of Internet of Things (IoT) in Adoption of Industry 4.0", *Journal of Industrial Integration and Management*, 07, (04), 2021, pp. 515-33
- [21] V. Dwivedi, N. Parashar, and B. Srinivasan: "Distributed learning machines for solving forward and inverse problems in partial differential equations", *Neurocomputing*, 420, 2021, pp. 299-316
- [22] Z. Magyar, and P. Pepó: "Studying standard and rheological quality parameters of winter wheat by Python visualisation", *Plant, Soil and Environment*, 2021
- [23] P. Subedi, A. Alsadoon, P. W. C. Prasad, S. Rehman, N. Giweli, M. Imran, and S. Arif: "Network slicing: a next generation 5G perspective", *EURASIP Journal on Wireless Communications and Networking*, 2021, (1), 2021, pp. 102
- [24] L. Nadeem, M. A. Azam, Y. Amin, M. A. Al-Ghamdi, K. K. Chai, M. F. N. Khan, and M. A. Khan: "Integration of D2D, Network Slicing, and MEC in 5G Cellular Networks: Survey and Challenges", *IEEE Access*, 9, 2021, pp. 37590-612
- [25] A. Ghazi, S. A. Aljunid, S. Z. S. Idrus, C. B. M. Rashidi, A. Al-dawoodi, B. A. Mahmood, A. Fareed, M. U. Zaenal, N. H. Qasim, and R. M. Rafiq: "A Systematic review of Multi-Mode Fiber based on Dimensional Code in Optical-CDMA", *Journal of Physics: Conference Series*, 1860, (1), 2021, pp. 012016
- [26] I. B. J. Omar Faris Mahmood, Nameer Hashim Qasim: "Performance Enhancement of Underwater Channel Using Polar Code-OFDM Paradigm", *International Research Journal of Modernization in Engineering Technology and Science (IRJMETS)*, 3, (9), 2021, pp. 55-62
- [27] M. Pundir, J. K. Sandhu, and A. Kumar: "Quality-of-Service Prediction Techniques for Wireless Sensor Networks", *Journal of Physics: Conference Series*, 1950, (1), 2021, pp. 012082
- [28] A. K. Sultania, C. Blondia, and J. Famaey: "Optimizing the Energy-Latency Tradeoff in NB-IoT With PSM and eDRX", *IEEE Internet of Things Journal*, 8, (15), 2021, pp. 12436-54
- [29] N. Qasim, Khlaponin, Y., & Vlasenko, M.: "Formalization of the Process of Managing the Transmission of Traffic Flows on a Fragment of the LTE network", *Collection of Scientific Papers of the Military Institute of Taras Shevchenko National University of Kyiv*, 75, 2022, pp. 88-93
- [30] S. Selvakumar, and S. S. Manivannan: "A Spectrum Defragmentation Algorithm Using Jellyfish Optimization Technique in Elastic Optical Network (EON)", *Wireless Personal Communications*, 127, (2), 2022, pp. 1187-205
- [31] J. Saldana, O. Topal, J. Ruiz-Mas, and J. Fernández-Navajas: "Finding the Sweet Spot for Frame Aggregation in 802.11 WLANs", *IEEE Communications Letters*, 25, (4), 2021, pp. 1368-72
- [32] M. Dieste, R. Panizzolo, and J. A. Garza-Reyes: "A systematic literature review regarding the influence of lean manufacturing on firms' financial performance", *Journal of Manufacturing Technology Management*, 32, (9), 2021, pp. 101-21
- [33] F. Mirmohammadian, J. Asgari, S. Verhagen, and A. Amiri-Simkooei: "Improvement of Multi-GNSS Precision and Success Rate Using Realistic Stochastic Model of Observations", *Remote Sensing*, 14, (1), 2022
- [34] D. Chicco, M. J. Warrens, and G. Jurman: "The coefficient of determination R-squared is more informative than SMAPE, MAE, MAPE, MSE and RMSE in regression analysis evaluation", *PeerJ Computer Science*, 7, 2021
- [35] C. Tudor, and R. Sova: "Flexible Decision Support System for Algorithmic Trading: Empirical Application on Crude Oil Markets", *IEEE Access*, 10, 2022, pp. 9628-44
- [36] A. G. Pantelis, G. K. Stravodimos, and D. P. Lapatsanis: "A Scoping Review of Artificial Intelligence and Machine Learning in Bariatric and Metabolic Surgery: Current Status and Future Perspectives", *Obesity Surgery*, 31, (10), 2021, pp. 4555-63
- [37] Q. V. Khanh, N. V. Hoai, L. D. Manh, A. N. Le, and G. Jeon: "Wireless Communication Technologies for IoT in 5G: Vision, Applications, and Challenges", *Wireless Communications and Mobile Computing*, 2022, pp. 3229294
- [38] F. Liu, L. Zhang, R. Du, D. Li, and T. Li: "Two-Stage Hybrid Precoding for Minimizing Residuals Using Convolutional Neural Network", *IEEE Communications Letters*, 25, (12), 2021, pp. 3903-07
- [39] T. V. Nguyen, T. N. Tran, K. Shim, T. Huynh-The, and B. An: "A Deep-Neural-Network-Based Relay Selection Scheme in Wireless-Powered Cognitive IoT Networks", *IEEE Internet of Things Journal*, 8, (9), 2021, pp. 7423-36